

FIG. 1

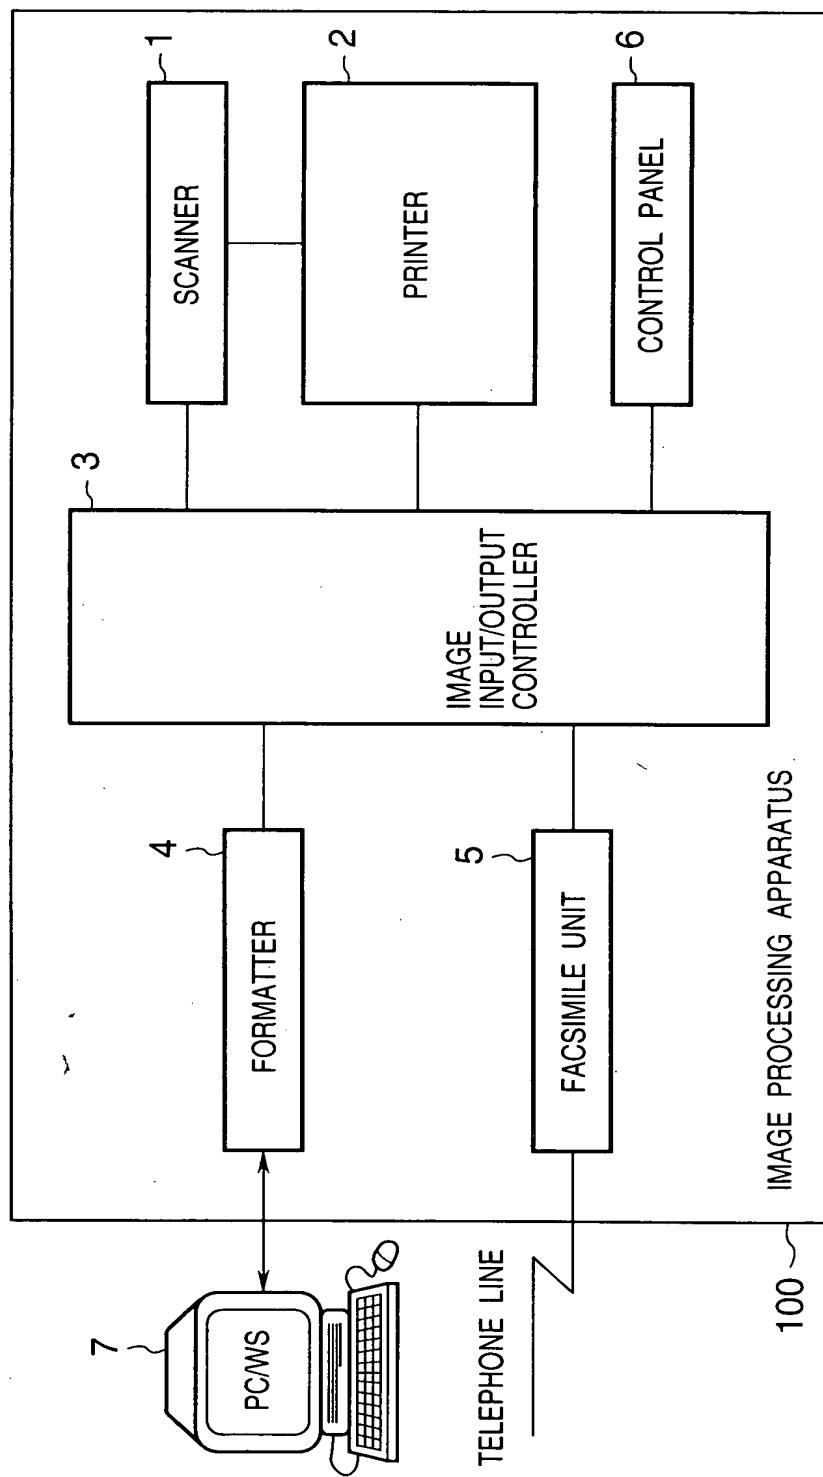


FIG. 2

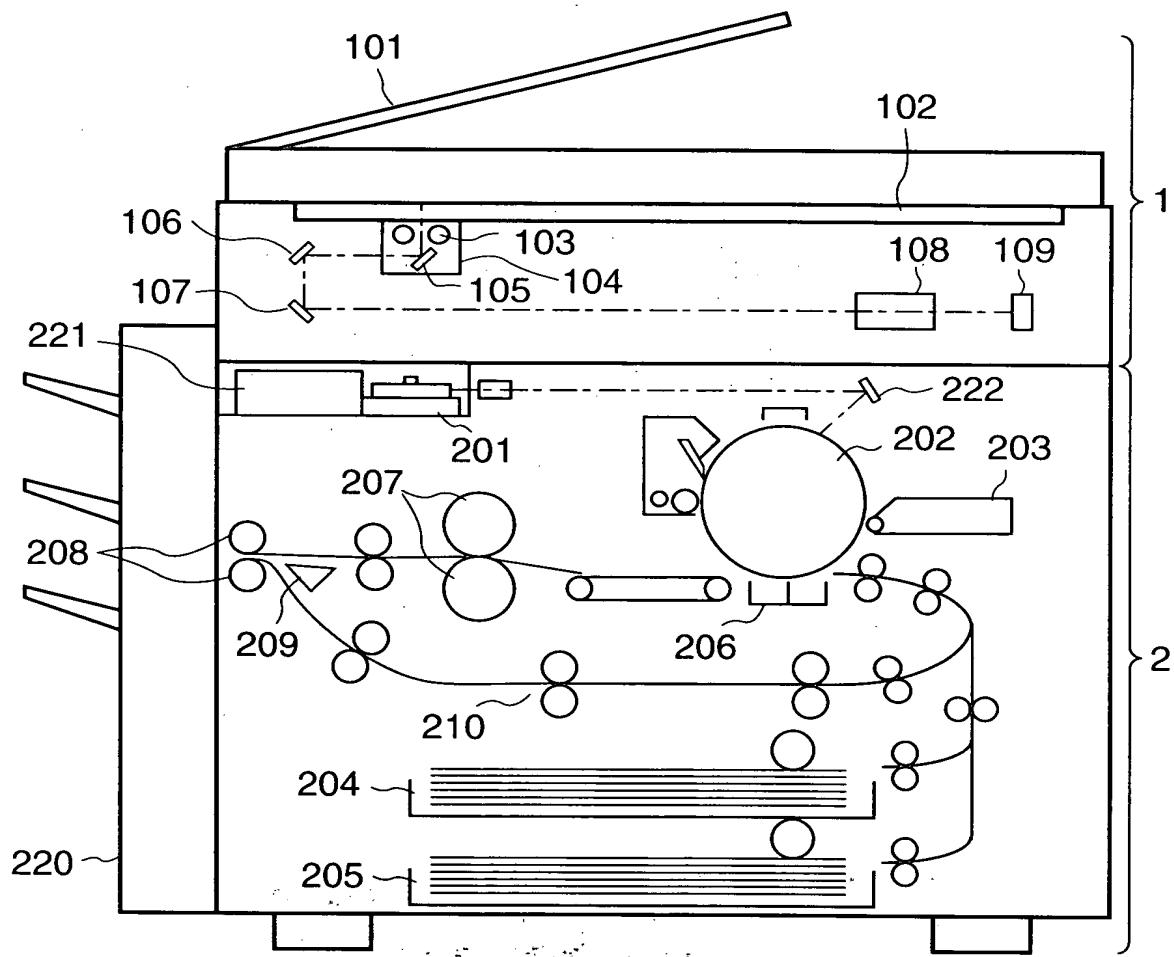


FIG. 3

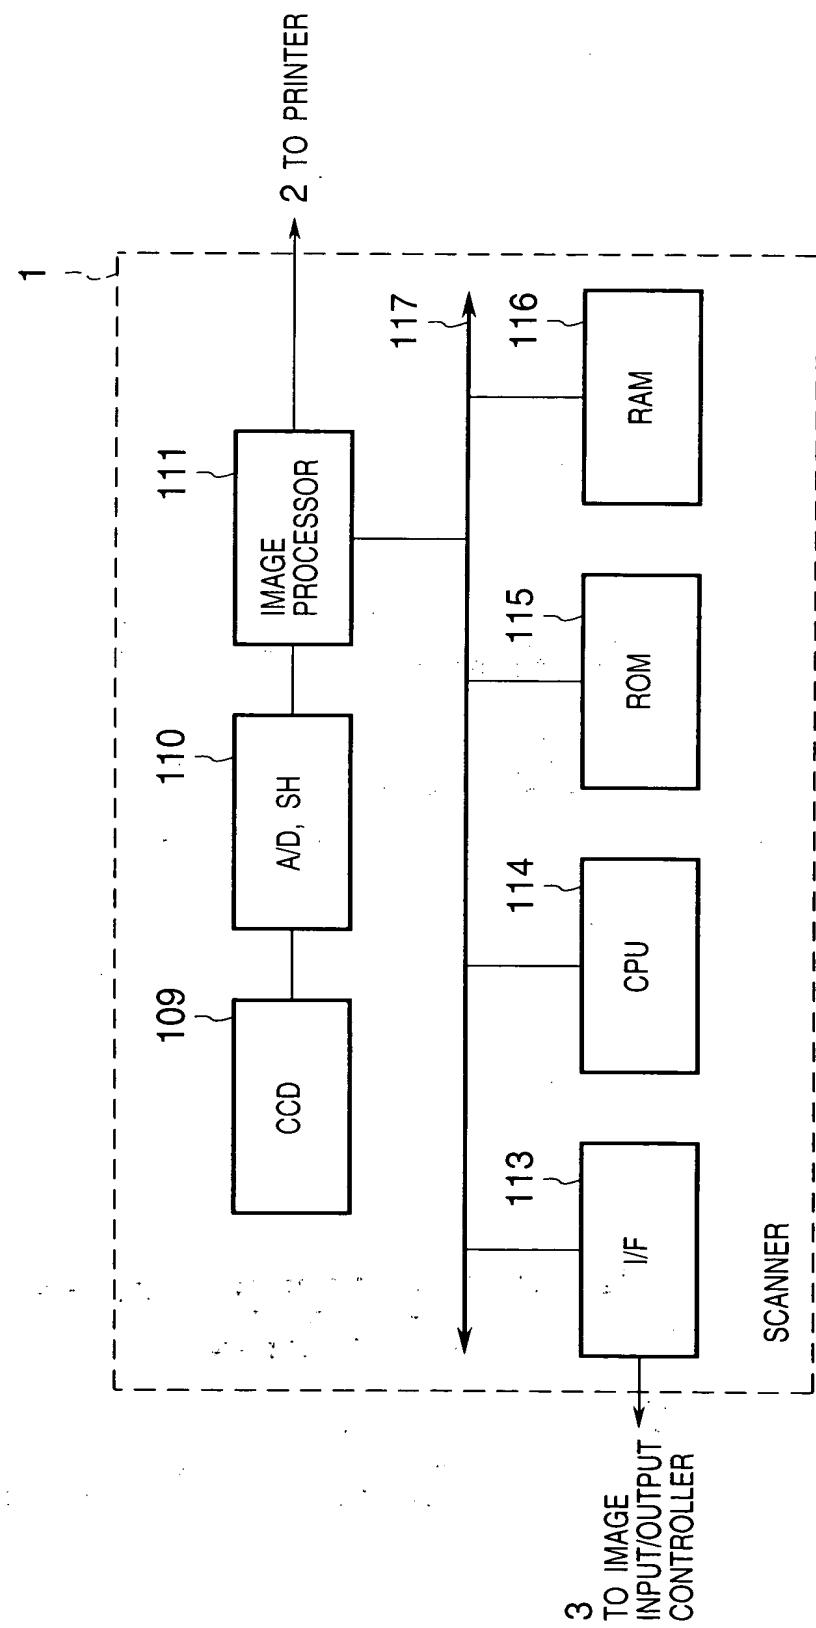


FIG. 4

4/18

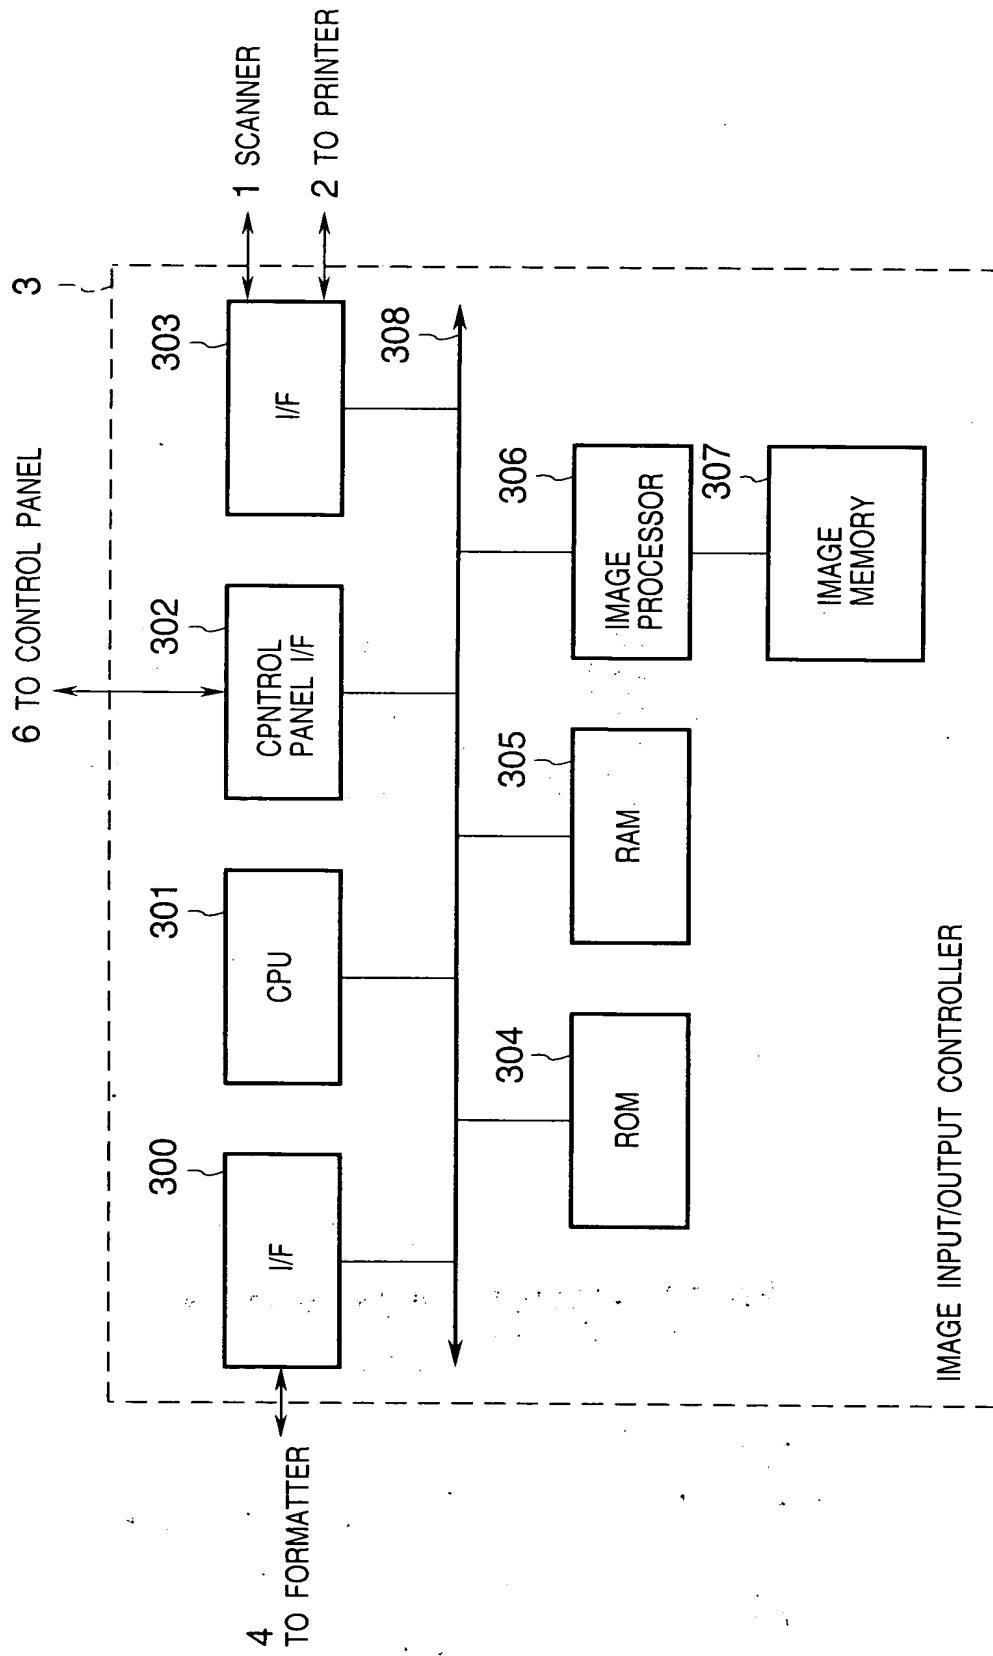


FIG. 5

5/18

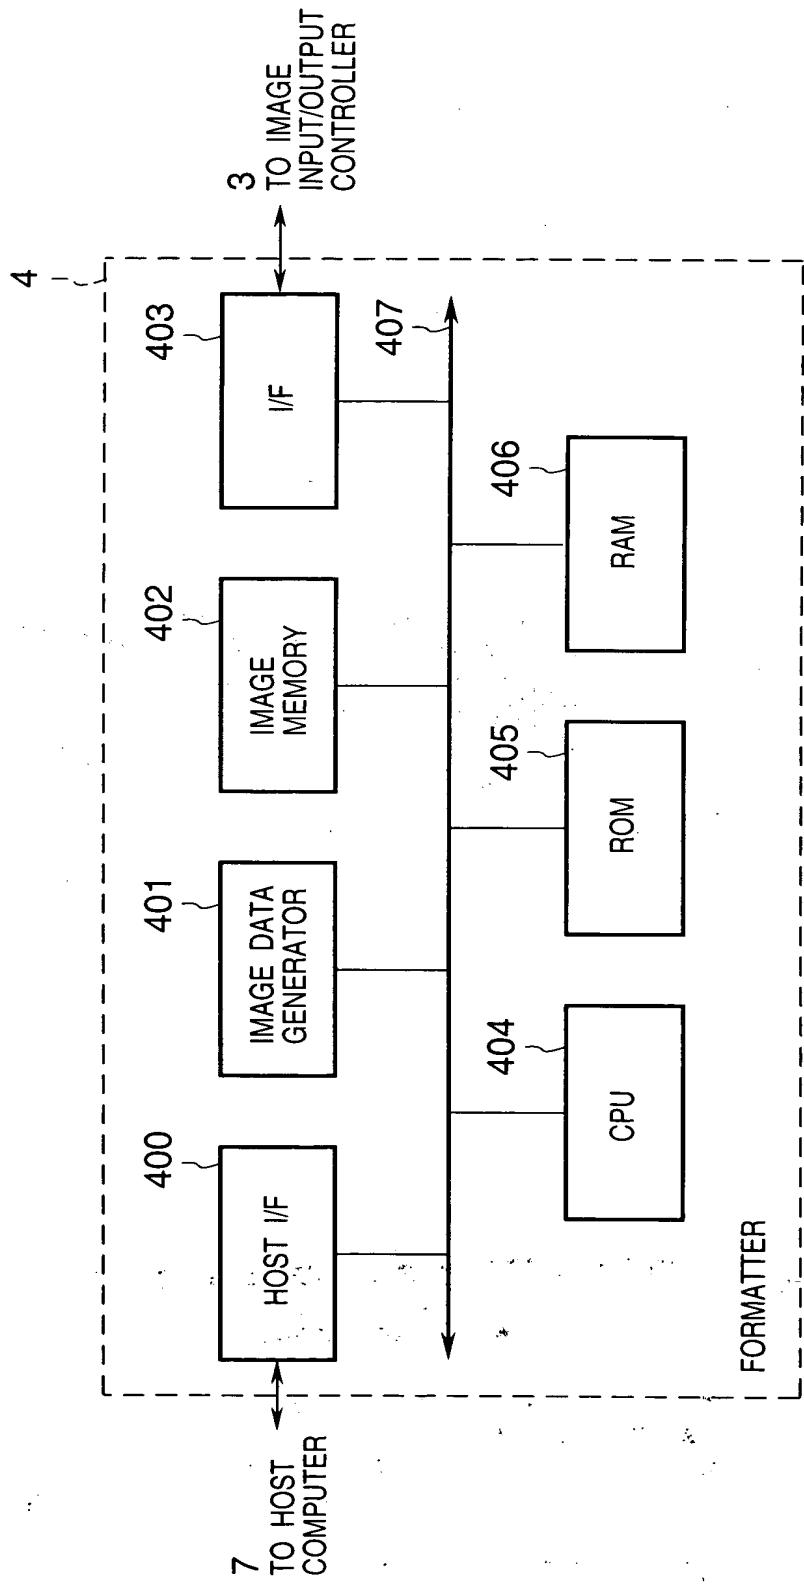


FIG. 6

6/18

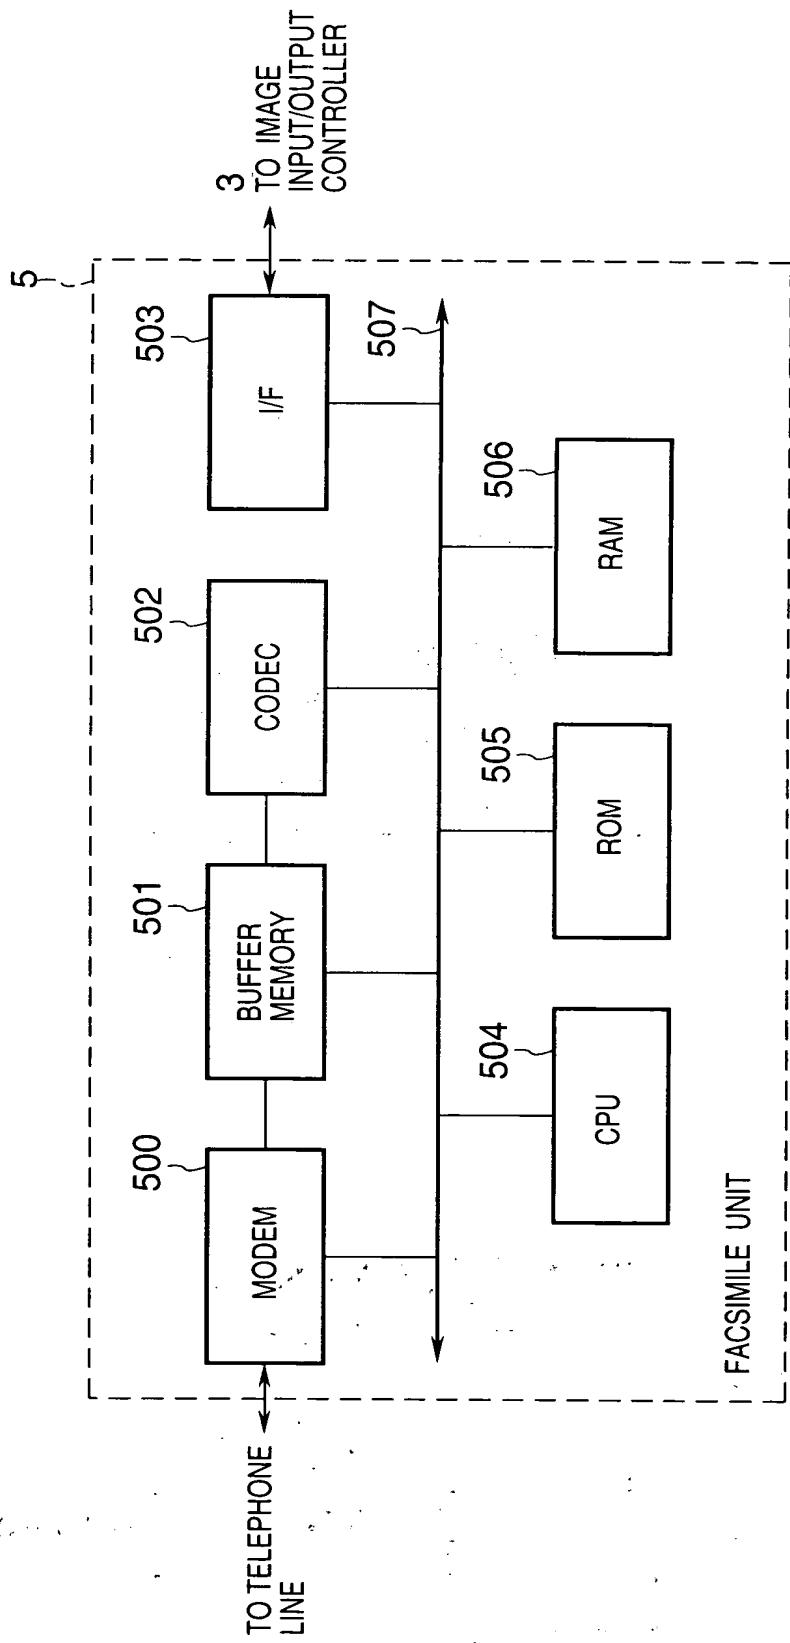


FIG. 7

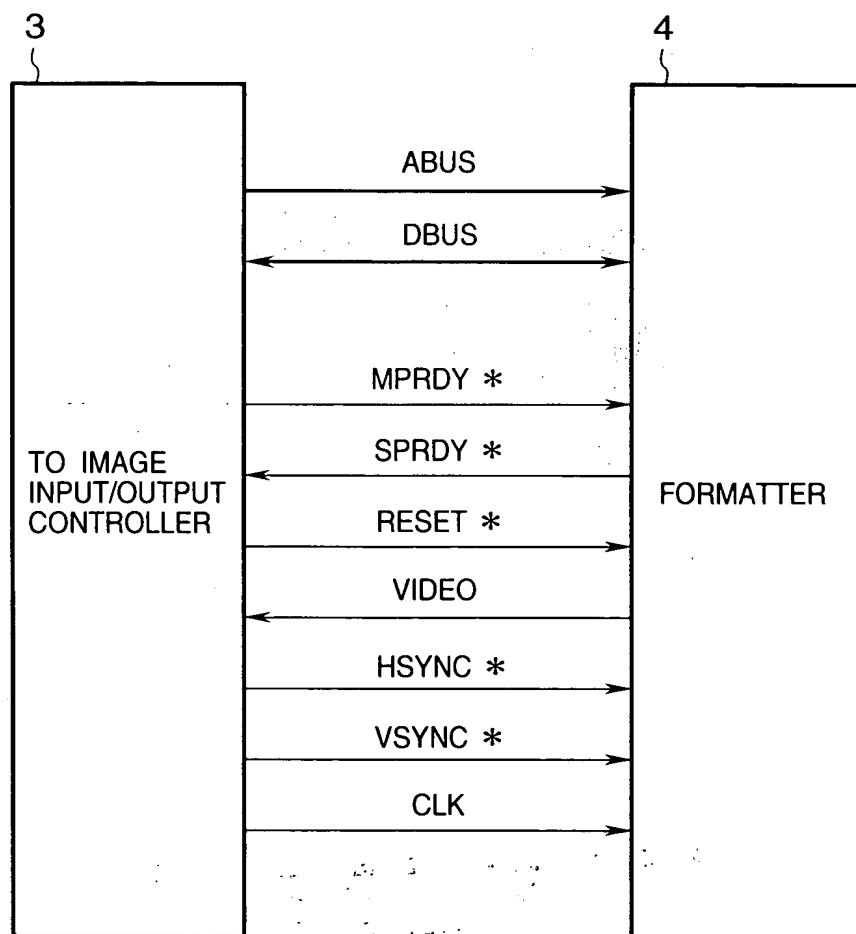


FIG. 8A

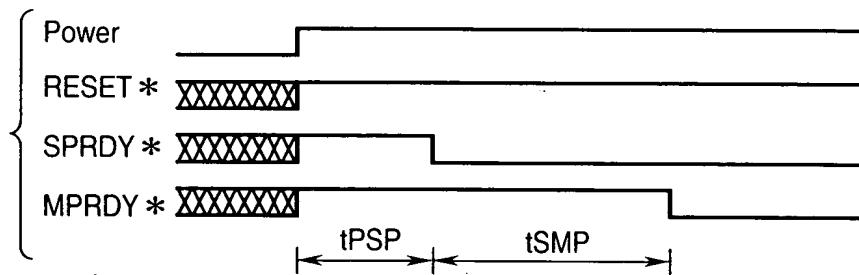


FIG. 8B

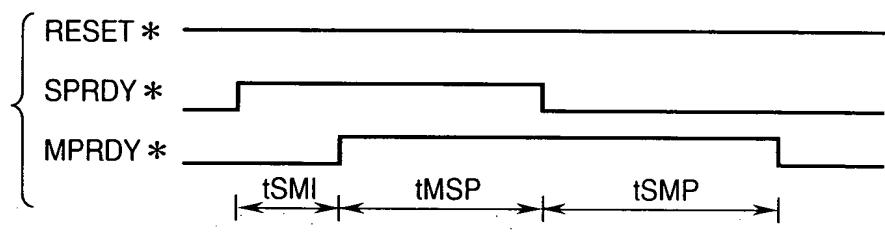


FIG. 8C


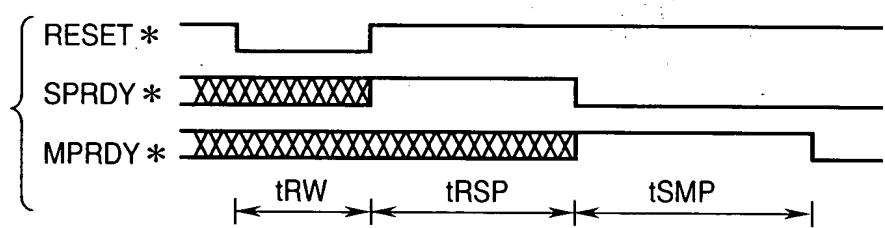


FIG. 8D


Symbol	Description	Min.	Max.
tPSP	Power On to SPRDY* falling	100us	-
tSMP	SPRDY* falling to MPRDY* falling	100us	-
tSMI	SPRDY* rising to MPRDY* rising	1s	-
tMSP	SPRDY* rising to SPRDY* falling	100us	-
tRW	RESET* Pulse Width	50ms	-
tRSP	RESET* rising to SPRDY* falling	100us	-

6
FIG.
F

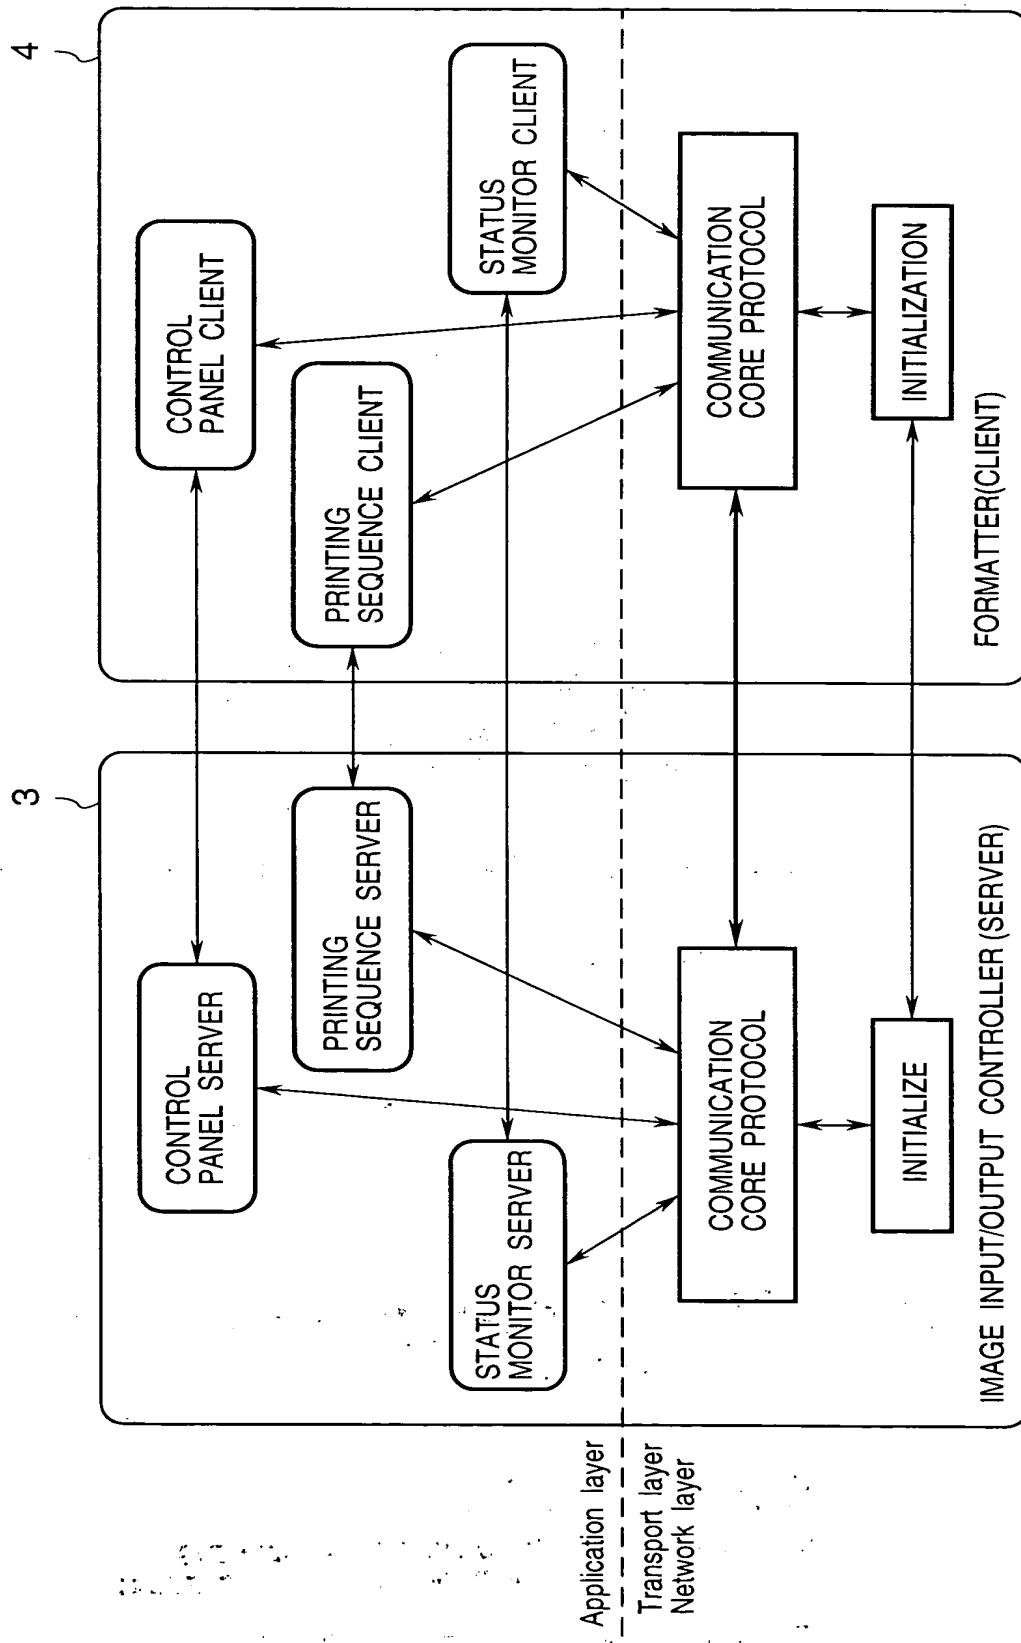

10/18

FIG. 10

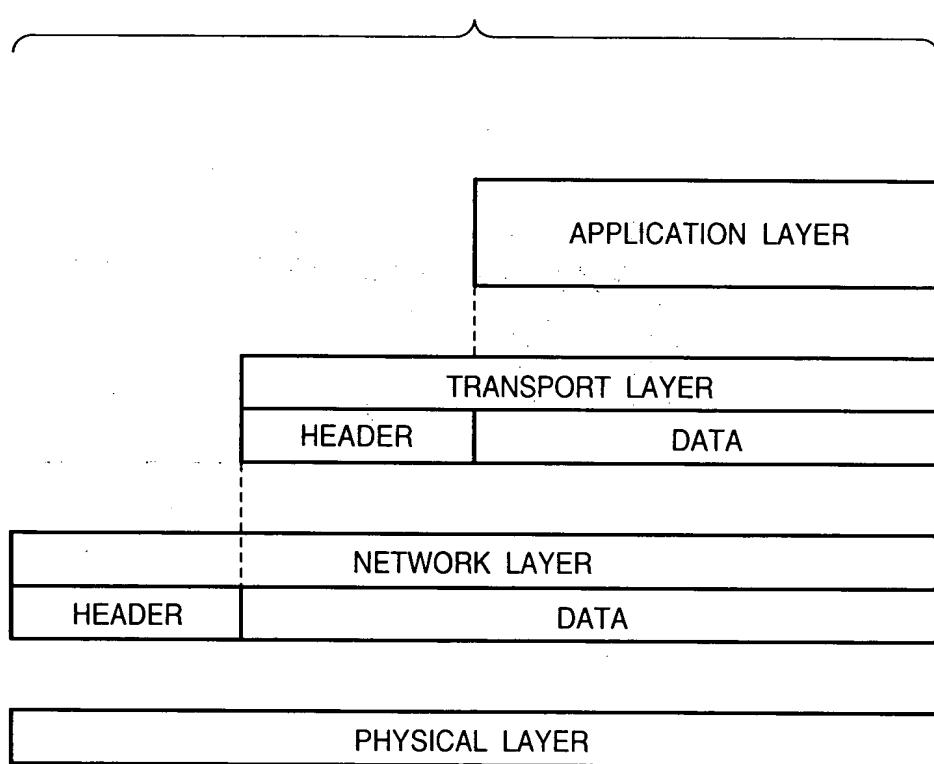

11/18

FIG. 11A

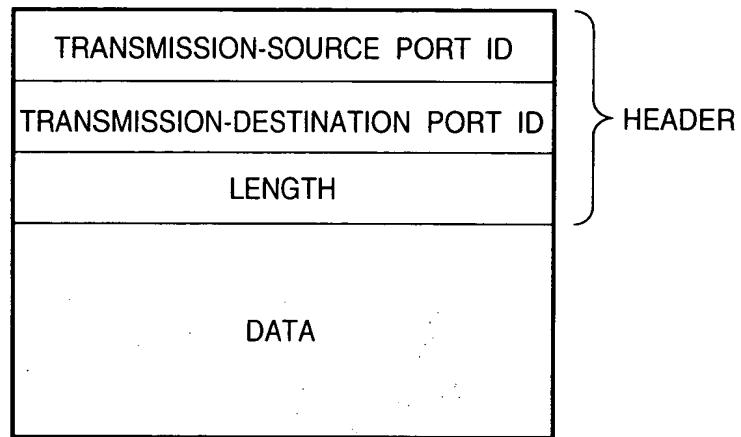


FIG. 11B

LOGICAL PORT NAME	Port ID
CONTROL PANEL	0x0010
STATUS MONITOR	0x0020
PRINT REQUEST	0x0030

12/18

FIG. 12

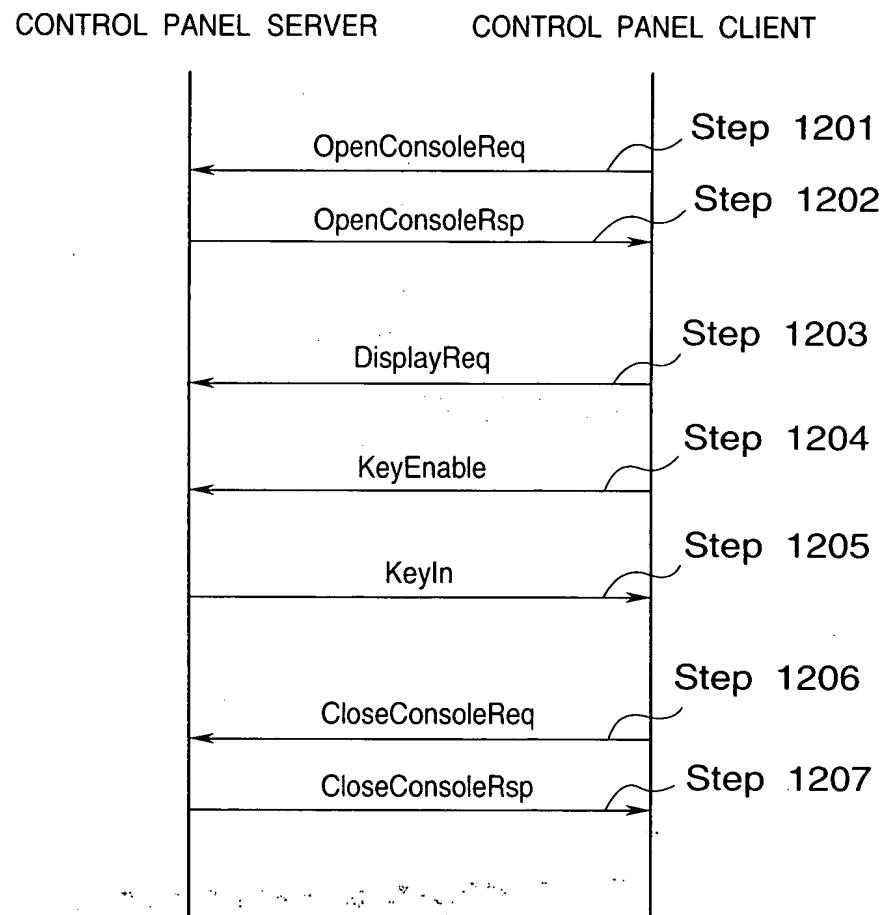


FIG. 13A

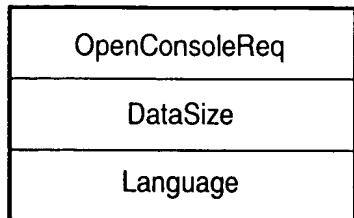


FIG. 13C

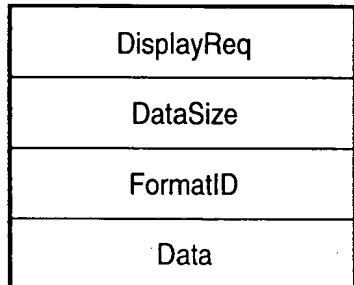


FIG. 13E




FIG. 13F

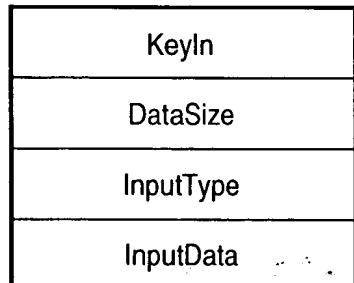


FIG. 13G

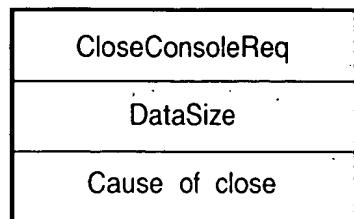


FIG. 13B

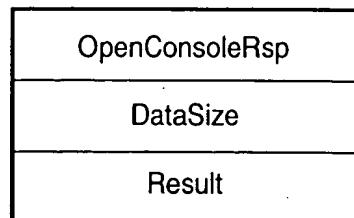


FIG. 13D

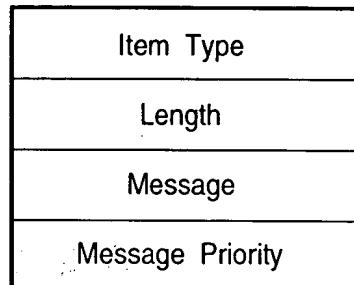


FIG. 13H




FIG. 14


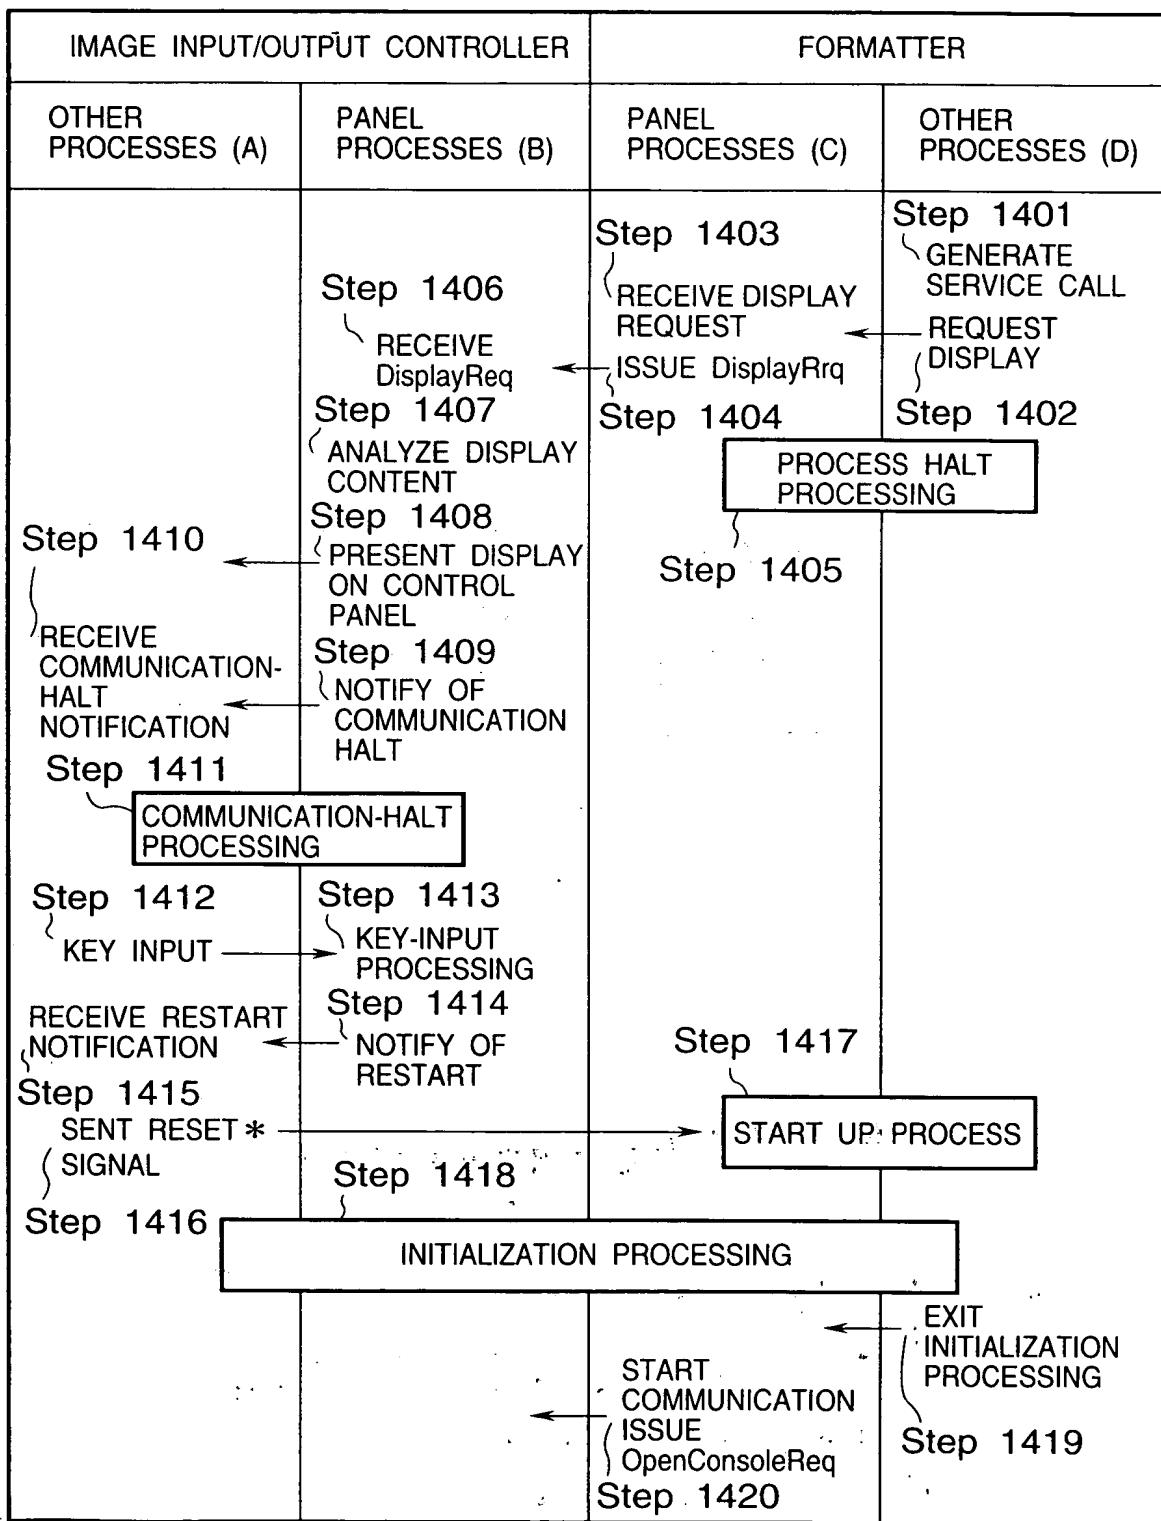


FIG. 15

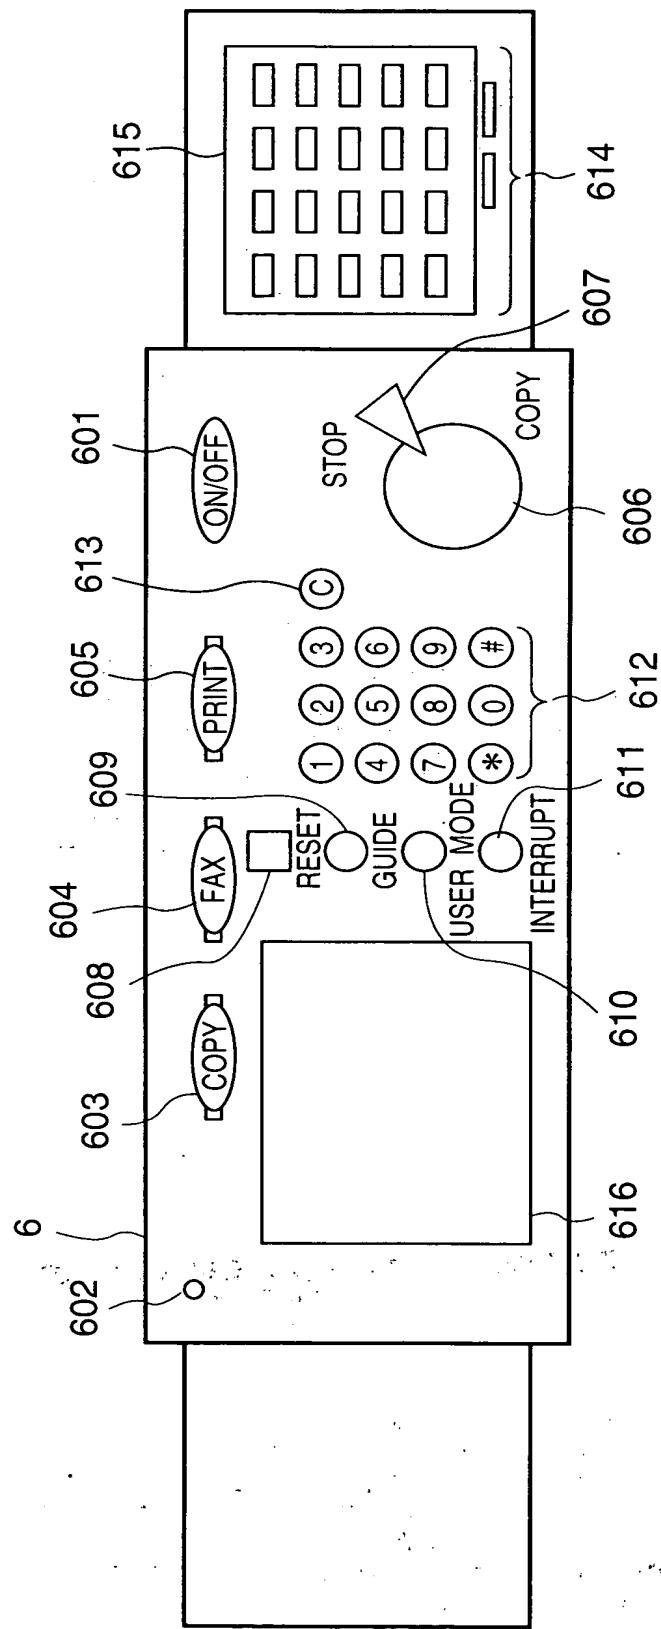

16/18

FIG. 16A

 COPY →

MAKE COPY			
100 % A4			
REDUCE	SAME SIZE	EN-LARGE	SELECT PAPER
ZOOM 			
SORTER		DOUBLE-SIDED	CHARACTERS/PHOTOGRAPH
LIGHTER		AUTOMATIC	DARKER
APPLICATION MODE			

FIG. 16B

 FAX →

SEND		06/15 12:21
		
STANDARD : USUAL : CHARACTER AUTOMATIC RECEIVE		
RE-SOLUTION : DENSITY : IMAGE QUALITY		<input type="checkbox"/> DIRECT
<input type="checkbox"/> COPY COMPLETED STAMP		
ABBREVIATED DIALING	ON-HOOK	REDIAL
		<input type="checkbox"/> APPLICATION MODE

FIG. 16C

 PRINT →

00 PRINT A4		
OPERATING MODE	PRIORITY EMULATION	PRINTER
UTILITY	SET-UP	
SELECT PAPER FEED	EJECT	
DOUBLE-SIDED	RESET	
ON-LINE	OFF-LINE	

17/18

FIG. 17A

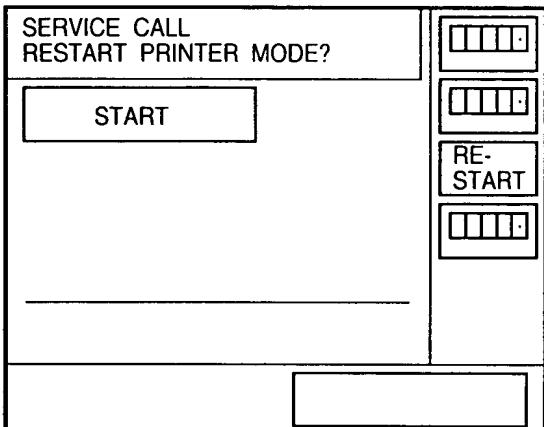


FIG. 17B

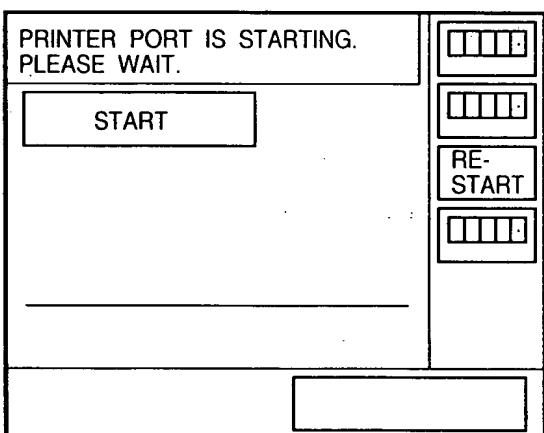


FIG. 17C

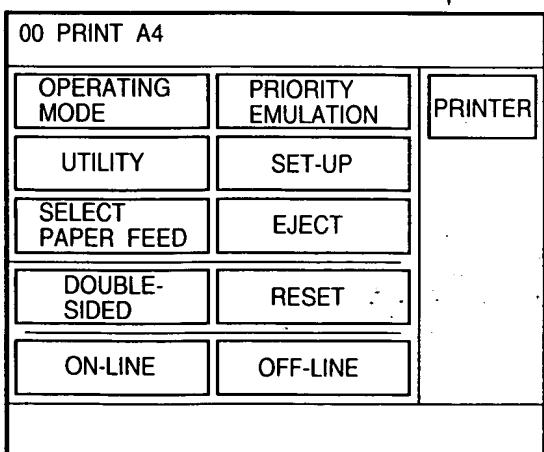


FIG. 17D

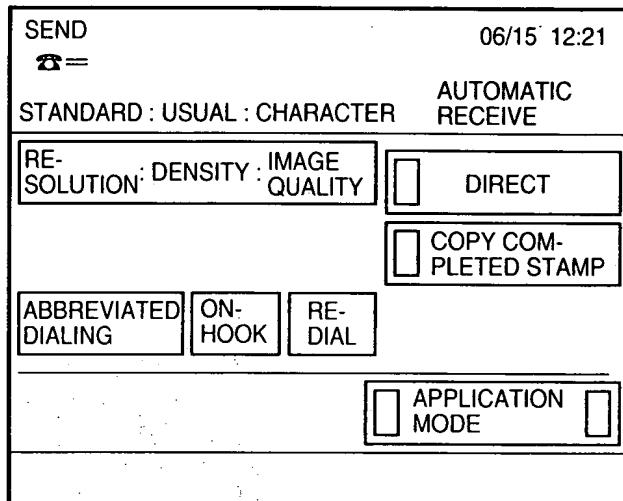


FIG. 18

